


AT-HL-6.2-8-N

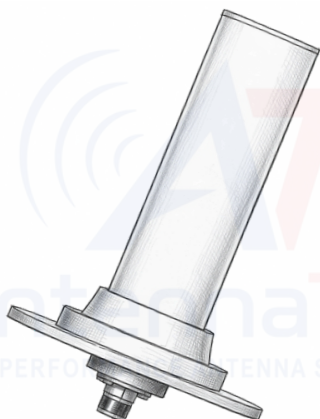

Key Specifications


Operating frequency band	6.2 - 8 GHz
Connector	N type female
VSWR	< 2:1
Gain	> 12 dBi
3dB Beamwidth	20-30 degrees
Polarization	circular polarization
Size	length 20cm, width 13cm
Axial Ratio	< 2dbi

This high-performance helical antenna covers 6.2–8 GHz frequency range and provides circularly polarised directional gain for upper C-band and lower X-band RF applications. With more than 12 dBi gain, controlled beamwidth, and compact radome construction, it is suitable for high-frequency telemetry, tracking links, wireless video systems, RF field testing, and directional communication platforms requiring stable circular polarisation.

Please contact AntennaTec for a full interface control drawing.


VSWR

Voltage Standing Wave Ratio (VSWR)

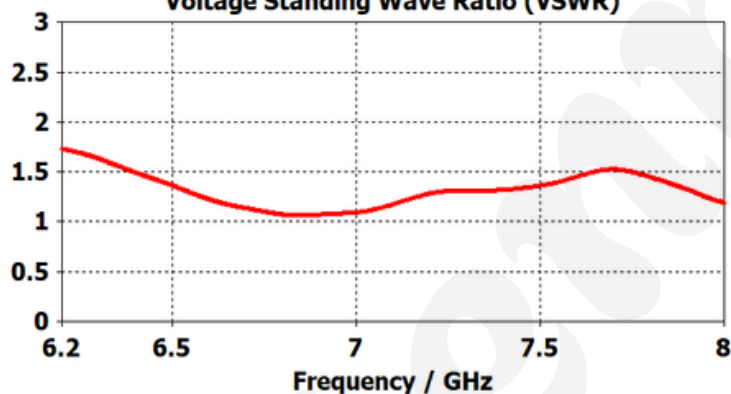


S11

S-Parameters [Magnitude]

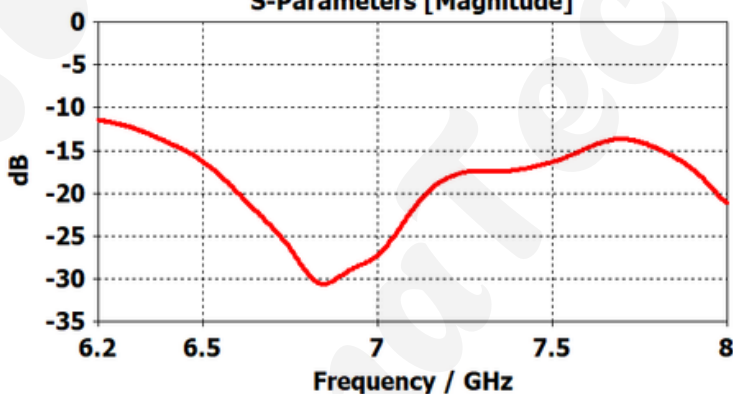


Gain

Max Gain over Frequency

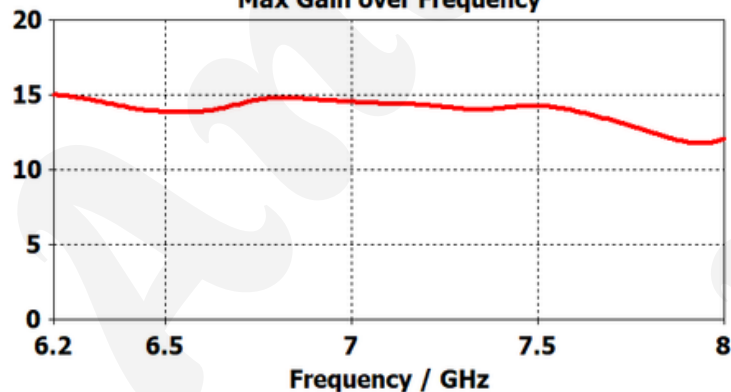

Axial Ratio

AR

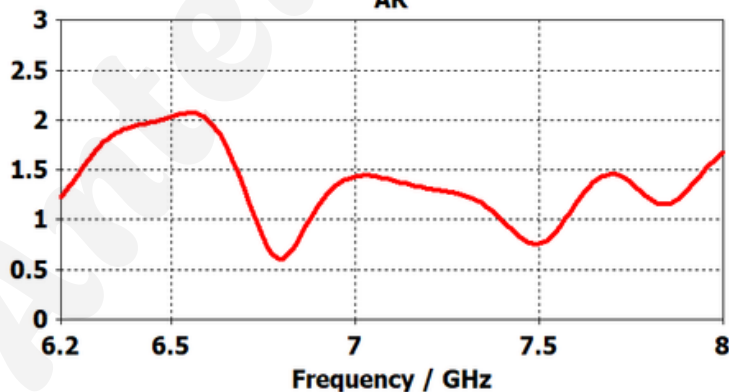


AntennaTec may update or improve these specifications from time to time to enhance product design, manufacturing, or performance. This document contains official AntennaTec product information and must not be reproduced, modified, or used for commercial purposes without written permission from AntennaTec.




6.2-8 GHz circularly polarized helical antenna fitted with an N type connector and radome

Radiation Patterns: Red = Phi 0; Green = Phi 90


6.2GHz

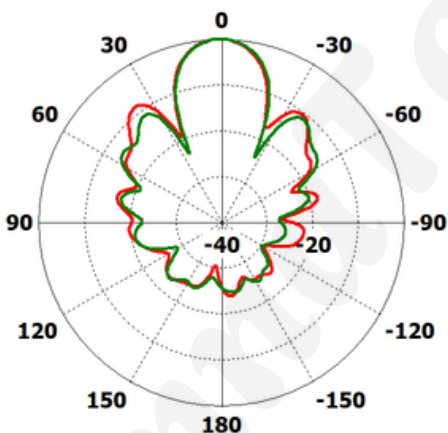


6.6GHz

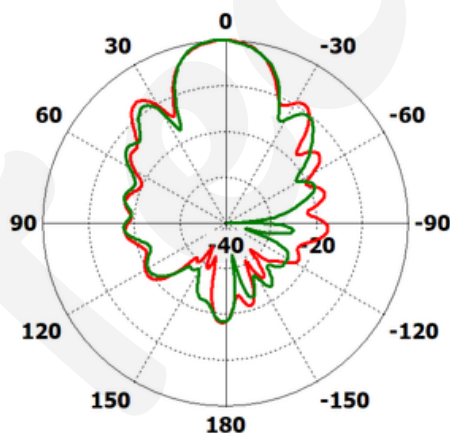


7GHz

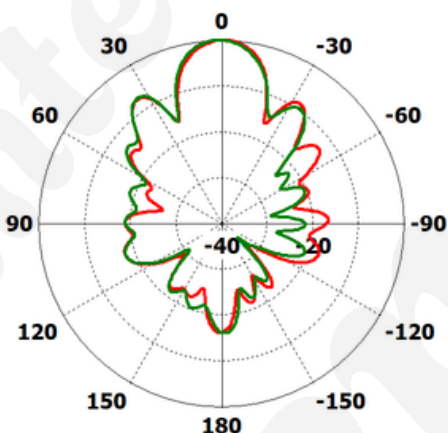


7.4GHz

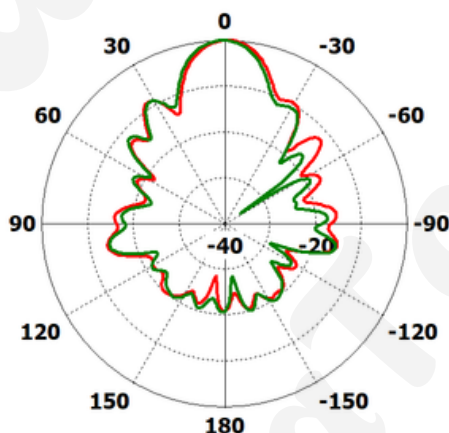

7.8GHz

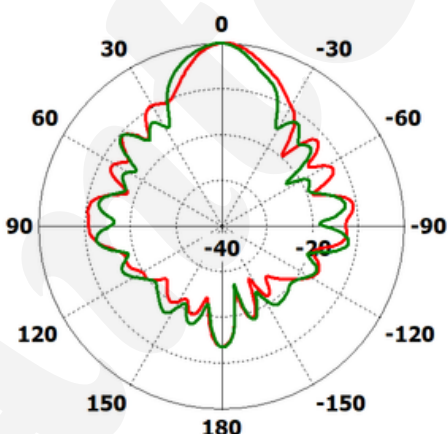

8GHz

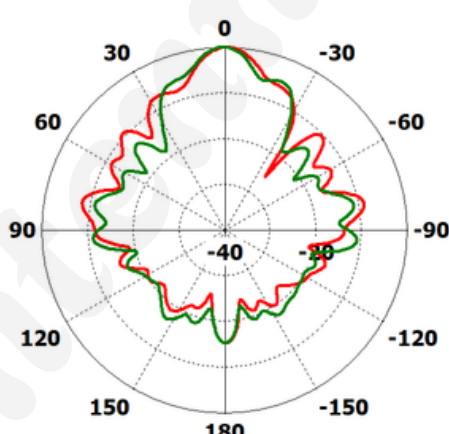

AntennaTec may update or improve these specifications from time to time to enhance product design, manufacturing, or performance. This document contains official AntennaTec product information and must not be reproduced, modified, or used for commercial purposes without written permission from AntennaTec.

